


Pre-Fab Systems

Model FE (Fully Enclosed)

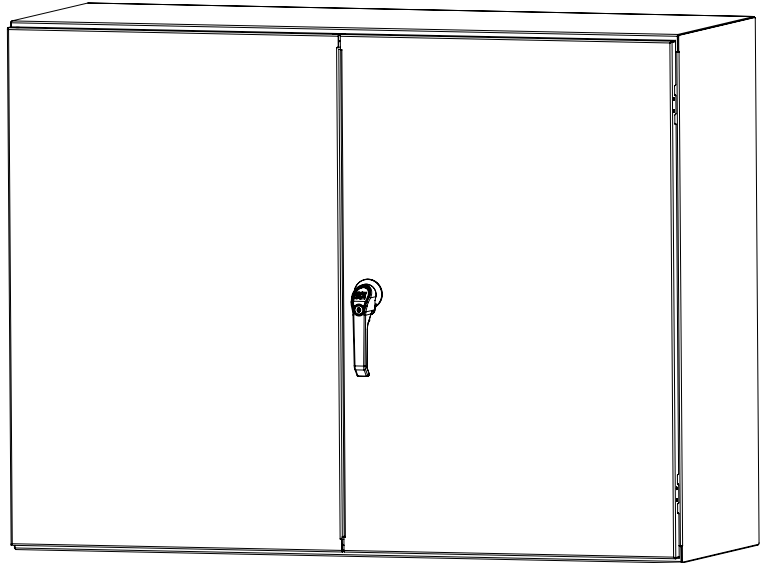

Key Features

- Convenient Configuration
- Complete Sample Stream
- Customize to Your System
- Saves Time and Money
- Professional Appearance
- Key-Lockable Security
- Complete Weather Protection

Application

Advantage Controls prefabricated systems simplify the installation of water treatment control equipment, saving time and money.

Panels include a sample stream assembly with isolation valves, line strainer, back check and sample valve.

Units come ready to operate with your separately ordered controller, pumps and bleed valve(s) installed and pre-wired. Advantage Controls also has the flexibility to fabricate customized systems to meet your specific needs.

FE fully enclosed series prefabricated systems mount controller, pumps and sample stream in a Nema12 metal cabinet.

Build a Model Number

FE - - - - -

Enclosure Type _____
3 = Metal 48"W x 36"H x 16"D

Loop Material with valves, strainer, back check and sample (*no strainer & check) _____
A = 3/4" PVC **A0** = no loop **A1** = 1" PVC
A2 = 3/4" Black iron **A3** = 3/4" Copper **A4** = 1" Black iron *
A5 = 3/4" CPVC * **A6** = 3/4" brass valves on PVC loop

Injection Tees _____
3/4" PVC **1" PVC** **1" CPVC** **3/4" Black Iron**
B1 = 1 tee, **B2** = 2 tees, **B11, B12,** **B21, B22,** **B31, B32,**
B3 = 3 tees, **B4** = 4 tees... **B13, B14...** **B23, B24...** **B33, B34...**

Probe Tees Total number of tees not counting flow tee _____
(Only needed if different than controller ordered)
3/4" PVC Quick Release **1" PVC Quick Release** **1" Black Iron**
C1 = 1 tee, **C2** = 2 tees, **C21, C22,** **C41, C42,**
C3 = 3 tees, **C4** = 4 tees... **C23, C24...** **C43, C44...**

Pump Mounting Shelf (Add a "1" after number for blank shelf) _____
D1 = Shelf for 1 **D2** = Shelf for 2 **D3** = Shelf for 3 **D4** = Shelf for 4...

Strainer Options (3/4" basket strainer included as standard) _____
E = 3/4" Flushable Y **E4** = 1" Basket Strainer **E5** = 3/4" Black Iron Strainer
E6 = 1" Clear Basket

Flow Indicator 1-10 gpm _____
F = 3/4" 100PSI **F2** = 3/4" 145PSI **F3** = 3/4" 100PSI with flow switch

Corrosion Coupon Stations (Must be standard or K loop direction) _____
3/4" PVC **1" PVC** **3/4" Black Iron**
G2 = 2 Stations **G12** = 2 Stations **G22** = 2 Stations
Add "L" to get clear PVC over coupon

Solid Feeder (Order SFS separately; no D or G options with H; no room for controller with H3) _____
H1 = For a SFS-101 **H2** = For 2 SFS-101's **H3** = For 3 SFS-101's

J = Bleed off leg (Order bleed valve separate) w/ shut-off valve _____

Loop Direction (Standard is in and out on the right) _____
K = In/Out Left **K1** = Left to Right **K2** = In/Out Bottom **K3** = In/Out Top **K4** = Right to Left

Corrosion Sensor Tees 90° _____
M1 = 1 PVC 3/4", **M2** = 2 PVC 3/4" **M11** = 1 PVC 1", **M12** = 2 PVC 1" **M21** = 1 Iron 1", **M22** = 2 Iron 1"

Whole Pre-Fab Options _____
P = Wire channel duct **R** = Mounting rails **S** = Electrical junction box
V = Window **V2** = Windows in both doors **W** = Free standing leg kit
Y = Non ACI equip to be supplied

Get the Advantage



4700 Harold Abitz Dr
Muskogee, OK 74403
800-743-7431 phone
888-686-6212 fax
www.advantagecontrols.com