


MegaTron *SS* Controller

Microprocessor Control of:

- Conductivity
- pH
- ORP
- Chemical Feed
- Biocide Feed
- Service Reports
- 4-20mA In & Outs

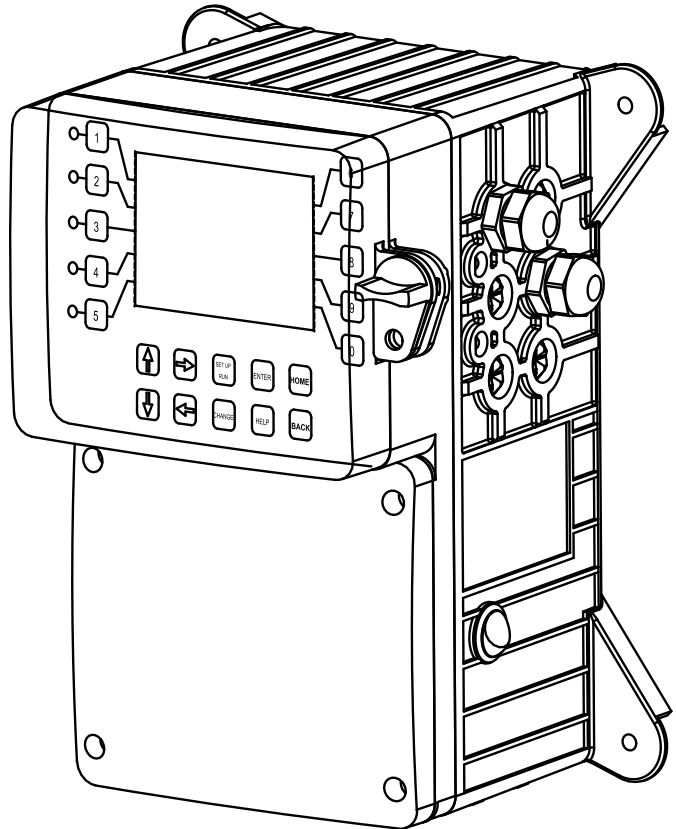

Key Features

- Customizable LCD Display
- On Board History Graphs
- Simple ATM Style Menu
- One Point Calibration
- Internet Communications Option
- 5 Assignable Relays
- Relay Test Keys
- Customizable Notepad
- Multi-Level Security Code
- LSI or RSI Index Options
- 2 Year Replacement Warranty
- Email Alarm Capable
- MODbus and BACnet Options

Application

The MegaTron SS controllers offer all of the user friendly features of the original MegaTron at a more economical price for single water treatment systems.

Units can be configured to control a wide range of digital and analog inputs. Relay activation and names plus many other features are field selectable. The "Notepad" allows the input and history gathering of service report parameters.

MegaTron SS units can control a single cooling tower or boiler system with the most customization flexibility available.

Build a Model

The model number starts with SS followed by the code for each function needed for the first system. (SSCPF3E)

Once the main control functions have been selected, insert another - and list the desired common options. (SSCPF3-H1).

Conductivity Control (1 per system max)

- B2** = BE-32 Standard Boiler probe
- C** = TE-4A Standard Tower probe

PH Control (1 per system max)

- P** = TPE-21 Standard Tower probe

ORP Control (1 per system max)

- R** = TOE-21 Standard ORP probe

Feed Timers (max of 5 per system)

- F1 to F5** (F4 = Four feed timers)

Flow Switch

- E** = Flow Switch

OPTIONS

- A** - Conduit connection
- A3** - Conduit with CE approval
- H1** - Internet Connect Communications
- H4** - Internet card with phone modem
- H5** - Internet card with cellular router
- H11** - Internet card w/ CAT5 & Modbus TCP/IP
- H21** - Internet card w/ CAT5 & BACNet TCP/IP
- H31** - Internet card for LonWorks
- N3** - (3) 4-20mA Inputs (no option U3 if selected)
- O3** - (3) 4-20mA Outputs
- S** - pH saturation indexes (with pH control)
- U3** - (3) 0-5 volt inputs (no option N3 if selected)
- V** - 5 volt D.C. output with water meter wires
- W3** - (3) Auxiliary flow meter inputs
- Y** - Agency Approval (ETL, US&C)

NOTES:

1. Timers selectable (pulse, %, post bleed, limit or 28-day). Each system has 2 water meter inputs.
2. All expansion slots provided.
3. MegaTron SS controllers can have 3 probes max.
4. MegaTron SS controllers have 5 relays max.
5. Change H1 option to H11 for MODbus TCP/IP or H21 for BACnet IP read only communications.
6. Boiler conductivity should only be used on continuous or surface lines; not bottom blowdown lines.
7. Contact the factory for a complete option list.

Specifications

Electrical

- **Input:** 95-240 VAC, 50/60 Hz
- **Control:** Equal to input voltage (95-240VAC) fused at 2.5A per relay

Prewired units are supplied with an 8' (248.84 cm) power cord and 8" (20.32 cm) output receptacles.

Operational

- **Display:** 240 x 128 Graphic LCD
- **Conductivity Control:** 0-10,000 μ S/cm scale
Boiler sample method is selectable from continuous, timed sampling or sample and hold.
- **pH:** 0-14 scale
- **ORP:** +/- 1000 millivolts scale
The ORP setpoint can be tied to an optional 28-day feed timer as an override.
- **Accuracy:** +/- 1%
- **Feed Timers are all selectable from:**
 - Pulse** - water meter activated w/accumulator
 - Percent** - 1 - 100% of a cycle time.
 - Limit** - Limits feed with bleed
 - Post** - 1-100% of post bleed or other time with an over all limit.
 - 28 Day** - biocide timer.

Enclosure

Heavy duty NEMA 4X style high impact thermoplastic with padlockable gasketed Lexan viewing door.

Environment

Ambient temperature: 0° to 125°F (-17 to 52°C)
Relative humidity: 0 to 100%

Electrodes

Tower Standard electrodes are supplied in 3/4" (1.91 cm) SCH 80 PVC female slip tees with quick release nut.

- **Conductivity:** TE-4A 150 psi (10.3 bar) / 140°F(58°C) Max
 - **pH:** TPE-2 100 psi (6.8 bar) / 140°F(58°C) Max
 - **ORP:** TOE-2 100 psi (6.8 bar) / 140°F(58°C) Max
 - **Temperature:** TC-1 150 psi (10.3 bar) / 140°F (58°C) Max
- Boiler Conductivity electrodes are supplied with 1" (2.54 cm) MNPT SS threads.
- **Conductivity:** BE-32 250 psi (17.2 bar) / 436°F(224°C) Max

Shipping Weight: Approximately 8 lbs. (3.62 kg)

Dimensions:

W 10" (28.4 cm) x H 12" (30.5 cm) x D 7.25" (18.4 cm)

Get the Advantage



4700 Harold Abitz Dr
Muskogee, OK 74403
800-743-7431 phone
888-686-6212 fax
www.advantagecontrols.com