

MegaTron *XK*

WATER TREATMENT CONTROLLER


The MegaTron XK offers all the features and options of the popular MegaTron XS in a new rugged enclosure to accomodate even more options to meet today's water treatment system requirements.

MICROPROCESSOR CONTROL OF:

Conductivity, pH, ORP, Chemical & Biocide Feed, Service Reports, 4-20mA In & Outs

KEY FEATURES

- Customizable LCD Display
- On Board History Graphs
- Single System Logic
- Simple ATM Style Menu
- WebAdvantage Communications Options
- Up to 8 mA Inputs
- Customizable Notepad
- Multi-Level Security Code
- Wi-Fi Capable
- Non-Volatile Memory
- 5 Assignable Relays

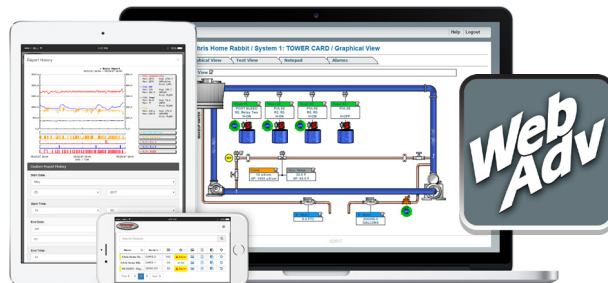

PRODUCT OVERVIEW

The MegaTron XK water treatment controller is the latest innovation in our highly acclaimed MegaTron product line.

Units can be configured to control a wide range of digital and analog inputs. Advanced relay logic and customization lets you configure a unit to meet your specific system needs.

XK units can control a single tower, boiler, wastewater or other industrial application and provide web based communications and reporting with WebAdvantage.

Build a ModelX K C P R F E — H2 N8 Z1

Step 1 system card functions

Conductivity	
B	Boiler with BE-34BC
C	Tower with TE-4A
C12	Low range with AL-4ASS
Misc Conductivity	
M	General range with DI-4A
M4	General range with TE-4A
pH	
P	Single set point with TPE-21
Q	Dual set point with TPE-21
ORP	
R	Standard with TOE-21
Feed Timers	
F	Five selectable
Flow Assembly	
E	Float style flow switch, PVC
E6	Flow input only

Step 2 whole unit options

XK standard features include 5 control relays with prewired USA cords. List any desired options in alphabetical order.

Power Cord Options		100-230 VAC except A22	
A	All 1/2" FNPT conduit connections		
A2	Class F cord, no relay pigtails, CE mark		
A3	Liquid tight only, CE mark		
A5	USA power cord, no relay pigtails		
A7	Class I cord, no relay pigtails, CE mark		
A8	Prewired USA cord, 1/2" conduit relay		
A22	24 VDC power instead of 100-230 VAC		
Communication Options		No comms standard	
H2	WebAdvantage only no Wi-fi		
H	WebAdvantage only with Wi-fi		
H11	Internet card, CAT5, and Modbus TCP/IP		
H21	Internet card, CAT5, and BACnet TCP/IP		
Relay Options		(2.5 amp each)	
K1	(5) relay card not connected to power		
K2	(5) relay card all set for dry contact		
K3	No control relays		

mA In/Out Signals		8 signals max	
N4	(4)	mA inputs	
N8	(8)	mA inputs (no O4)	
O4	(4)	mA isolated outputs	
Accessories			
T	Configured for mounting of separately ordered CELLADV-0-12 or -24 inside controller		
V	24 VDC power for external signals		
W	(5) additional flowmeter pulse inputs		
Y	ETL Agency Listings (USA, CSA)		
Z	Black display cover		
Z1	Clear display cover		

Tower / general range conductivity sensors include a temperature reading. Additional sensor types are available. Consult dealer for additional options.

Specifications

Electrical Input	100-230 VAC, 50/60 Hz	Relative Humidity	0 to 100%
Relay Outputs	Individually fused and 2.5 amps. Dry contact limited to 2.5 mA at 28 VDC.	Conductivity Control	µS/cm, mS/cm, PPM scales up to 50,000 depending on sensor selection
Display	6.875" Diagonal LCD Touch Screen	pH Control	0-14 with single or optional dual set point
Digital Inputs	Inputs have 10K Ω pullup to 3.3 VDC from open collector open drain output	ORP Control	+/- 1,000 mV, 2nd set point timer linked
Flow Totalizing Inputs	10K Ω pullup to 5 VDC max rate 2.5 KHz from open collector open drain output	Accuracy	+/- 1% of scale
mA Inputs	Optical isolation, 250 Ω / 5 VDC @ 20 mA. Loop voltage to not exceed 30 VDC.	Selectable Feed Timers	Water meter pulse, Percent, Post, Limit, Recycle, and 28 day with reminder 1 for loss flow.
mA Outputs	Non-isolated. 12 VDC max load = 400 Ω. Isolated ext 24 VDC max load = 800 Ω.	mA Input Control	Customizable to desired range and scale
Ethernet	DHCP or static capable with 10/100 WiFi 802.11 (b/g/n)	mA Output	Proportional with second input conditioning
Approvals	CE, UL61010-1/CSA C22.2 No. 61010-1-12 + A1:2022 (R2022)	Tower probes supplied in 3/4" quick release PVC tees. pH and ORP probe bodies are CPVC.	
Enclosure	NEMA 4X style polycarbonate	TE-4A	150 psi (10.3 bar), 140°F (60°C) max
Ambient Temp	0° to 125°F (-17° to 52°C)	TPE-21	100 psi (6.8 bar), 140°F (60°C) max
Shipping Weight	Approximately 10 lbs. (4.536 kg)	TOE-21	100 psi (6.8 bar), 140°F (60°C) max
Dimensions	11" (27.94cm) W x 11.75" (29.84 cm) H	FS-OC (flow switch)	140 psi (9.6 bar), 140°F (60°C) max
		AL-4ASS	100 psi (6.8 bar), 212°F (100°C) max
		BE-32C	250 psi @ 400°F, SS/PEEK with 1" cross



4700 Harold-Abitz Dr
Muskogee, OK 74403

www.advantagecontrols.com

918-686-6211 phone
918-686-6212 fax

2025-11-06