

MicroLinX Electronic Metering Pumps

Outputs: 3-45 gpd • Pressures: 75-300 psi



MicroLinX Series L

- Wi-Fi Linx for smart phone programming
- Large graphic display and keypad programmable
- 12,000:1 turndown
- Stroke and power LEDs
- Clear cover
- Auto stop option

User selectable operation modes include:

- Manual
- 4-20 mA input
- Pulse input
- Pulse timer
- 28-Day timer
- Recycle timer



MicroLinX Series M

- Manual speed knob output control
- 200:1 turndown
- Stroke and power LEDs
- Clear cover



MicroLinX Series N




- Wi-Fi Linx output adjustment
- 12,000:1 turndown
- Stroke and power LEDs
- Clear cover



Available in 3 Colors



MicroLinX Screens

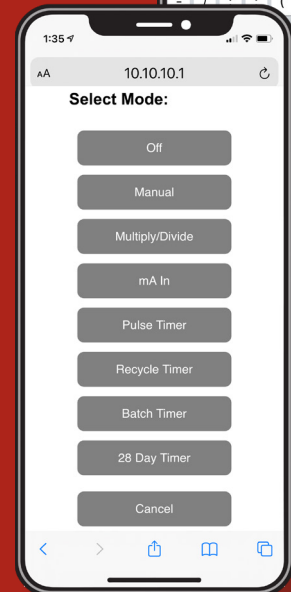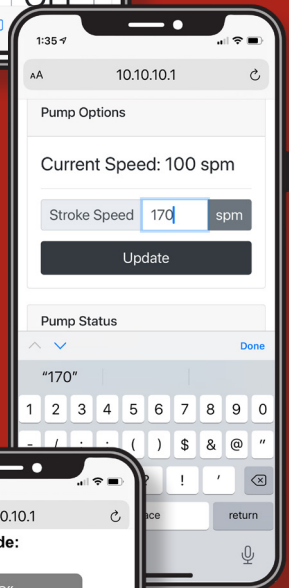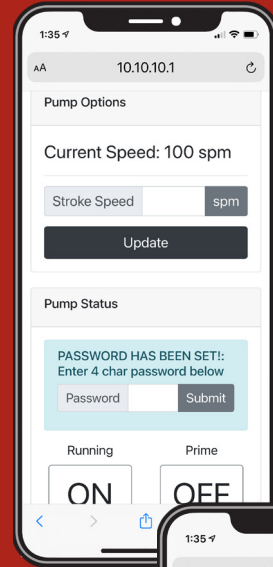

Liquid End Features

Easy to operate priming valve

Optional Degassing Valve

Guided double ball checks

Compact return tubing connection

Industrial PVDF head design

1/4" tubing, 3/8" tubing, or 1/4" FNPT connections available

Removable injection nozzle and strainer



Scan to learn more!



www.advantagecontrols.com